

Power Electronics Testings

LED Power Driver Test Solution

www.chromaate.com



Chroma

Turnkey Test & Automation Solution Provider



A Light Emitting Diode (LED), with low power consumption, compact size, long life duration and versatility, is ideal for lighting and illumination applications. LEDs have found its applications in LCD monitor/TV backlights, street lighting, automobile lighting, interior lighting, outdoors large screen displays, consumer electronics and various other applications.

LED power drivers are used to provide the power to the LEDs, and are usually designed as a constant current source due to the light emitting characteristics of the LEDs. Although LED power drivers' functions and characteristics differ from the general switch mode power supply (SMPS), the components used, the design topology and the testing requirements are very similar. Chroma is able to provide LED testing solution based on its thirty years of experience in providing power electronics testing solutions. These solutions include : programmable AC and DC Sources, high precision Power Meters, and LED Load Simulator specifically designed for LED power drivers. Chroma is also able to provide Automated Test Systems suitable for R&D, QA qualifications and mass production.




AC Power Source



Digital Power Meter



Input



LED Power Driver

Output




LED Load Simulator

Advance Programmable AC Power Sources


Model 61500 Series

Key Features





- ☑ Output : 500VA~4kVA/0~300VAC/424VDC
- ☑ AC, DC, AC+DC output mode
- ☑ Turn-on, turn-off phase angle control
- ☑ Programmable voltage and frequency slew rate
- ☑ Power line disturbance simulation : LIST, PULSE, STEP modes
- ☑ Distortion waveform editor : SYNTH and INTERHAR modes
- ☑ Measurement for RMS voltage, current, power, PF, VA, VAR, crest factor, peak and inrush current
- ☑ Standard AC source for IEC61000-3-2 testing
- ☑ IEC 61000-4-11, -4-13, -4-14, -4-28 regulation testing



Voltage Harmonic & Interharmonics Test



Voltage DIP, Short, Variation Regulation Test



Model	61501	61502	61503	61504
Power	500VA	1000VA	1500VA	2000VA
Voltage	150V/300V/Auto	150V/300V/Auto	150V/300V/Auto	150V/300V/Auto
Max. Current	4A/2A (150V/300V)	8A/4A (150V/300V)	12A/6A (150V/300V)	16A/8A (150V/300V)
Frequency	DC, 15 ~ 1kHz	DC, 15 ~ 1kHz	DC, 15 ~ 1kHz	DC, 15 ~ 1kHz

Ideal for Energy Star & High Precision Power Measurement Digital Power Meters

Model 66200 Series

Key Features

- ☑ Embedded high speed DSP, 16 bits Analog / Digital converters
- ☑ 5mA minimum current range(66203/66204) and 0.1mW power resolution
- ☑ Meets ENERGY STAR / IEC 62301 / ErP ecodeign / SPEC POWER measurement requirement
- ☑ Accumulated energy methods for unstable power measurement
- ☑ User-defined criteria provides automatic PASS/FAIL indications
- ☑ Optional remote interface: USB or GPIB+USB
- ☑ Support GPIB, USB, RS232, Ethernet (LXI) interface (66205)



66205



66203/66204



66200 Softpanel



IEC 61000-3-2
Current Harmonic Test
(Pre-compliance)



Power Efficiency
Test Softpanel

Model	66203/66204	66205
Parameters	V, Vpk, I, Ipk, Is, W, VA, VAR, PF, CF_I, F, THD_V, THD_I, Energy	Vrms, Vpk+, Vpk-, V_harm, V_THD, CFv, Irms, Ipk+, Ipk-, I_harmonic, I_THD, CFi, Is, W, VA, var, PF, Freq_V, Freq_I, Wh, Ah, ° (degree)
AC Voltage	15V/30V/60V/150V/300V/600Vrms (CF=2), 6 range	15V/30V/60V/150V/300V/600Vrms (CF=2), 6 ranges
AC Current	5mA/20mA/50mA/200mA/500mA/2A/5A/20Arms (CF=4)	Low Shunt: 5mA/20mA/50mA/200mA/300mA (CF=4) High Shunt: 500mA/2A/5A/20Arms/30Arms (CF=4)
Power	DC, 47Hz to 63Hz : 0.1% RD + 0.1% RNG 1KHz to 10KHz : (0.1+0.1 x kHz)% RD + 0.18% RNG	DC, 10Hz to 850Hz : 0.1% rdg+0.05% rng 850Hz to 10kHz : (0.1+0.07*kHz)% rdg+0.15% rng



LED Load Simulator

Model 63110A / 63113A / 63115A

Key Features

- ☑ Unique LED mode for LED power driver test
- ☑ Programmable LED dynamic resistance (Rd)
- ☑ Programmable internal resistance (Rr) for simulating LED ripple current (63110A)
- ☑ Fast response for PWM dimming test
- ☑ Up to eight channels in one mainframe
- ☑ 16-bit precision voltage and current measurement with dual-range
- ☑ Full Protection: OC, OP, OT protection and OV alarm

As a constant current source, the LED power driver has an output voltage range with a constant output current. LED power drivers are usually tested in one of the following ways;

1. With LEDs
2. Using resistors for loading
3. Using Electronic Loads in Constant Resistance (CR) mode, or Constant Voltage (CV) mode

However, all these testing methods each have their own disadvantages.

As shown on the I-V curve in figure 1, the LED has a forward voltage V_f and a operating resistance (R_a). When using a resistor as loading, the I-V curve of the resistor is not able to simulate the I-V curve of the LED as shown in blue on figure 1. This may cause the LED power driver to not start up due to the difference in I-V characteristic between the resistors and the LEDs. When using Electronic Loads, the CR and CV mode settings are set for when the LED is under stable operation and therefore, is unable to simulate turn on or PWM brightness control characteristics. This may cause the LED power driver to function improperly or trigger its protection circuits. These testing requirements can be achieved when using a LEDs as a load; however, issues regarding the LED aging as well as different LED power drivers may require different types of LEDs or a number of LEDs. This makes it inconvenient for mass production testing.

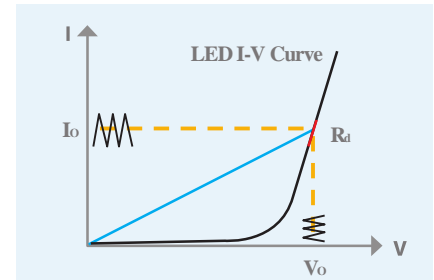


Figure 1 - LED V-I Characteristics



Mainframe Model	6312A (2 slots)	6314A (4 slots)
Dimensions (H×W×D)	194×275×550 mm / 7.6×10.8×21.7 inch	194×439×550 mm / 7.6×17.3×21.7 inch
Weight	15 kg / 33.1 lbs	21.5 kg / 47.4 lbs

Chroma has created the industries first LED Load Simulator for simulating LED loading with our 63110A load model from 6310A series Electronic Loads. By setting the LED power driver's output voltage, and current, the Electronic Load can simulate the LED's loading characteristics. The LED's forward voltage and operating resistance can also be set to further adjust the loading current and ripple current to better simulate LED characteristics. The 63110A design also has increased bandwidth to allow for PWM dimming testing.

Figure 2 shows the current waveform from a LED load. Figure 3 shows the current waveform from 63110A's LED mode load function. From figures 2 and 3, the start up voltage and current of the LED power driver is very similar. Figure 4 shows the dimming current waveform of the LED. Figure 5 shows the dimming current waveform when using 63110A as a load.




Figure 2 - LED loading




Figure 3 - 63110A LED mode loading




Figure 4 - LED dimming test




Figure 5 - 63110A dimming test

The internal resistance (R_r) can be adjusted to simulate the LED power driver output ripple current. The traditional E-load can not simulate the ripple current of LED shown as figure 6. Figure 7 shows the ripple current waveform from a LED load. Figure 8 shows the ripple current waveform from the 63110A LED mode load function. Figure 9 and 10 show the turn-on waveform of using a resistive load and an electronic load. It is obvious that these waveforms are very much different from the one with real LED (Figure 2). And it may cause the LED power drivers to fail as shown in figure 11, which causes it to go into protection. Figure 12 shows the I-V curve of different numbers of LEDs, and figure 13 shows the I-V curve of different characteristics of LEDs those can simulated by 63110A/63113A.




Figure 6 - Traditional E-load loading




Figure 7 - LED loading




Figure 8 - 63110A loading

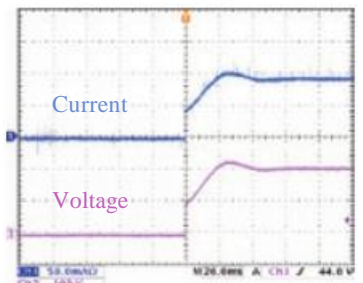


Figure 9 - Resistive loading




Figure 10 - CR mode loading




Figure 11 - Resistive loading (Fail)




Figure 12 - Simulate different number of LEDs

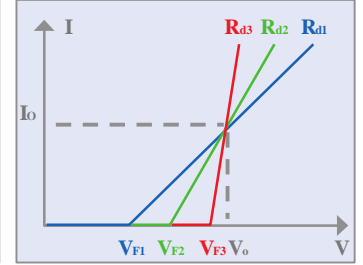


Figure 13 - Simulate different characteristic of LEDs

Model	63110A (100Wx2)		63113A		63115A	
Power	100W		300W		300W	
Current	0~0.6A	0~2A	0~5A	0~20A	0~5A	0~20A
Voltage *1	0~500V		0~300V		0~600V	
Min. Operating Voltage	6V@2A		4V@20A		4V@20A	
Constant Current Mode						
Range	0~0.6A	0~2A	0~5A	0~20A	0~5A	0~20A
Resolution	12μA	40μA	100μA	400μA	100μA	400μA
Accuracy	0.1%+0.1% F.S.		0.1%+0.1% F.S.	0.1%+0.2% F.S.	0.1%+0.1% F.S.	0.1%+0.2% F.S.
Constant Resistance Mode						
Range	CRL : 3Ω~1kΩ (100W/100V) CRH : 10Ω~10kΩ (100W/500V)		CRL @ CH : 0.2Ω~200Ω (300W/60V) CRL @ CL : 0.8Ω~800Ω (300W/60V) CRH @ CL : 4Ω~4kΩ (300W/300V)		CRL @ CH : 0.2Ω~200Ω (300W/60V) CRL @ CL : 0.8Ω~800Ω (300W/60V) CRH @ CL : 8Ω~8kΩ (300W/600V)	
Resolution*2	CRL : 62.5μS CRH : 6.25μS		CRL @ CH : 100μS CRL @ CL : 25μS CRH @ CL : 5μS		CRL @ CH : 100μS CRL @ CL : 25μS CRH @ CL : 2.5μS	
Accuracy	1kΩ : 4mS+0.2% 10kΩ : 1mS+0.1%		0.2% (setting + range)		0.2% (setting + range)	
Constant Voltage Mode						
Range	0~500V		0~300V		0~600V	
Resolution	20mV		6mV		12mV	
Accuracy	0.05% + 0.1%F.S.		0.05% + 0.1%F.S.		0.05% + 0.1%F.S.	
LED Mode						
Range	Operating Voltage: 0~100V/0~500V Ra Coefficient : 0.001~1 Vf: 0~100V/0~500V Current : 0~2A Ra: 1Ω~1kΩ/10Ω~10kΩ		Operating Voltage : 0~60V/0~300V Ra Coefficient : 0.001~1 Vf: 0~60V/0~300V LEDL @ CH : 0~60V-0~20A (Ra: 0.05Ω~50Ω) LEDL @ CL : 0~60V-0~5A (Ra: 0.8Ω~800Ω) LEDH @ CL : 0~300V-0~5A (Ra: 4Ω~4kΩ)		Operating Voltage : 0~60V/0~600V Ra Coefficient : 0.001~1 Vf: 0~60V/0~600V LEDL @ CH : 0~60V-0~20A (Ra: 0.05Ω~50Ω) LEDL @ CL : 0~60V-0~5A (Ra: 0.8Ω~800Ω) LEDH @ CL : 0~600V-0~5A (Ra: 8Ω~8kΩ)	
Resolution *2	Vo : 4mV/20mV Io : 0.1mA Ra Coefficient : 0.001 Ra : 62.5μS/6.25μS Vf : 4mV/20mV		Vo : 1.2mV/6mV Io : 100μA/400μA Ra Coefficient : 0.001 Ra : 400μS / 25μS / 5μS Vf : 1.2mV/ 6mV		Vo : 1.2mV/12mV Io : 100μA/400μA Ra Coefficient : 0.001 Ra : 400μS/25μS/2.5μS Vf : 6mV/ 60mV	
Dynamic Mode						
Dynamic Mode	--		C.C. Mode		C.C. Mode	
T1 & T2	--		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms	
Accuracy	--		1μs/1ms+100ppm		1μs/1ms+100ppm	
Slew Rate	--		0.8~200mA/μs 3.2~800mA/μs		0.8~200mA/μs 3.2~800mA/μs	
Resolution	--		0.8mA/μs 3.2mA/μs		0.8mA/μs 3.2mA/μs	
Accuracy	--		10% ±20μs		10% ±20μs	
Min. Rise Time	--		25μs (Typical)		25μs (Typical)	
Current	--		0~5A 0~20A		0~5A 0~20A	
Resolution	--		100μA 400μA		100μA 400μA	
Accuracy	--		0.4%F.S.		0.4%F.S.	
Measurement Section						
Voltage Read Back						
Range	0~100V	0~500V	0~60V	0~300V	0~60V	0~600V
Resolution	2mV	10mV	1.2mV	6mV	1.2mV	12mV
Accuracy	0.025%+0.025% F.S.		0.025%+0.025% F.S.		0.025%+0.025% F.S.	
Current Read Back						
Range	0~0.6A	0~2A	0~5A	0~20A	0~5A	0~20A
Resolution	12μA	40μA	100μA	400μA	100μA	400μA
Accuracy	0.05%+0.05% F.S.		0.05%+0.05% F.S.		0.05%+0.05% F.S.	

NOTE*1 : If the operating voltage exceeds 1.1 times of the rated voltage, it would cause permanent damage to the device.


NOTE*2 : S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.



High Performance Hardware Devices and Software Architecture

LED Power Driver Automatic Test Systems

Model 8491

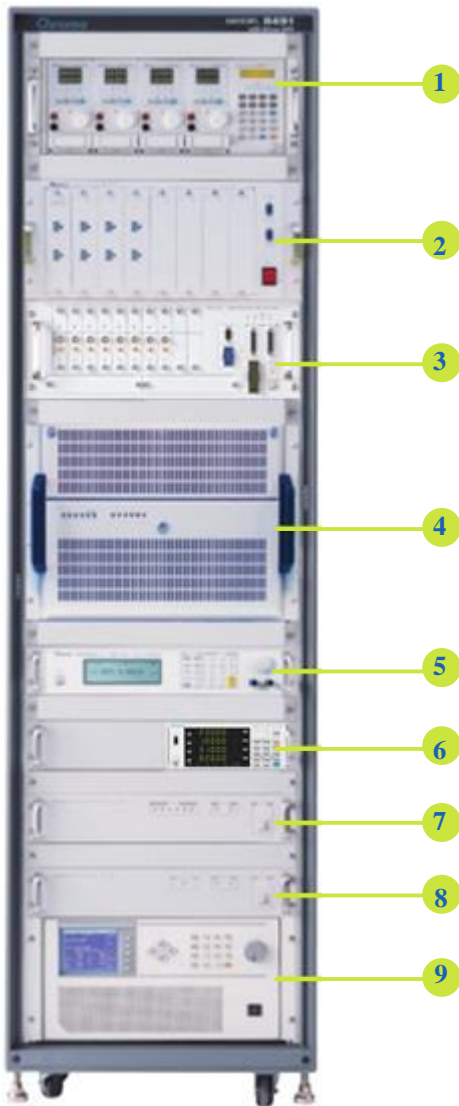

1. DC Electronic Load : Chroma 6310A/6330A Series
2. Transducer Unit/Module^{*1} : Chroma A849101/A849102, A849103, A849104
3. Time/Noise Analyzer : Chroma 80611 & 80611N card
4. Sytem Controller^{*2} : Industrial PC
5. DC Source: Chroma 62000P Series
6. Digital Power Meter : Chroma 66200 Series
7. OVP/Short Circuit Tester : Chroma 80612
8. ON/OFF Controller : Chroma 80613
9. AC Source : Chroma 6500/61500/61600 Series

*1 : A849101 transfers UUT output signal to voltage signal, and measure by 84911 LED power driver measurement card (200kHz). The optional 80611N Noise card is required for 20MHz ripplecurrent measurement.
 *2 : The controller includes both 84911 LED Power Driver measurement card and 84903 control card.
 - 84911: Measure rms current, dimming current/frequency/duty, timing, power & ripple current (200kHz)
 - 84903 : Provide BL control signal(DC level, PWM, SM bus), and enable ON/OFF signal.



The 8491 ATS hardware can be customized according to users (R/D, QC, Production Line) or according to different testing requirements. (Eg. lighting)

Optimized Test Items

The Chroma 8491 ATS is equipped with optimized standard test items for LED lighting driver testing. The user is only required to define the test conditions and specifications for the standard test items to perform the test.

The optimized test items cover 6 types of power supply test requirements. OUTPUT PERFORMANCES verify the output characteristics of the UUT. INPUT CHARACTERISTICS check the UUT input parameters. REGULATIONS test the stability of UUT under varying line-in and loading changes. TIMING & TRANSIENT test the timing and transient states during protection. PROTECTION TESTS trigger and test the protection circuit, the SPECIAL TESTS provide means to test the most sophisticated UUT when unique test routines are needed.

Output Performances

1. Output voltage
2. Output current
3. Ripple Current (RMS & p-p)
4. Dimming Current
5. Dimming Frequency
6. Dimming Duty
7. Efficiency
8. In-test adjustment
9. Turn on over shoot current

Input Characteristics

10. Input Inrush Current
11. Input RMS Current
12. Input Peak Current
13. Input Power
14. Current Harmonics
15. Input Power Factor
16. Input Voltage Ramp
17. Input Frequency Ramp
18. AC Cycle Drop Out
19. PLD Simulation

Regulation Tests

20. Current Regulation
21. Voltage Regulation
22. Total Regulation

Timing & Transient

23. Turn ON Time
24. Hold Up Time
25. Rise Time
26. Fall Time

Protection Tests


27. Short Circuit
28. OV Protection
29. OL Protection*
30. OP Protection*

Special Tests

31. GPIB Read/Write
32. RS232 Read/Write

* If UUT is constant voltage output

LED Lighting Driver Test Block Diagram

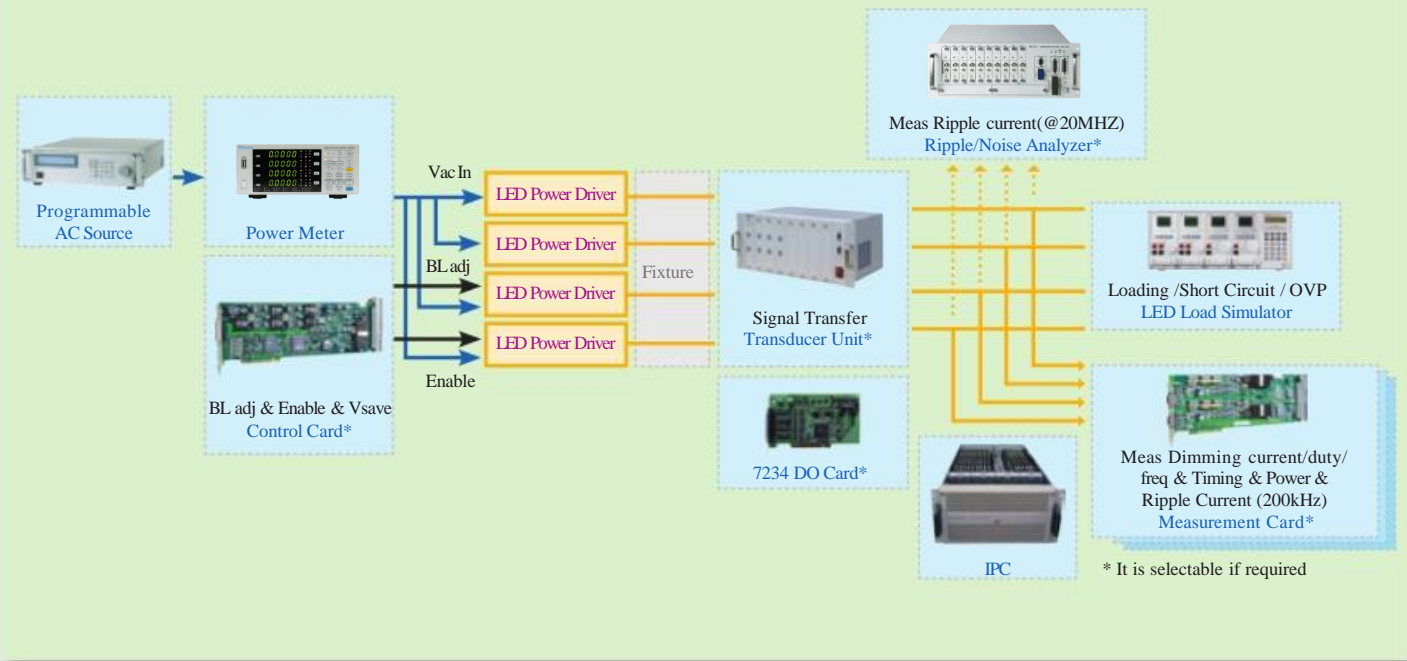


Software Platform of ATS

The Model 8491 Test System includes the industries most sophisticated power supply testing software platform, PowerPro III. PowerPro III provides users an open software architecture suited for a wide range of applications and devices. PowerPro III runs under the user friendly Windows 98/2000/NT/XP/7 operating environment, which provides engineers a dedicated LED Power Driver test system with easy access to Windows resources.




Software Main Screen

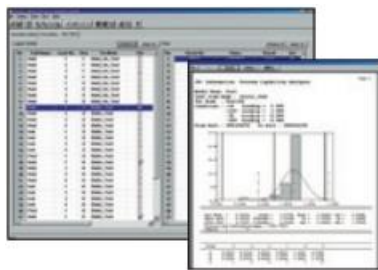

Statistical Report



Running GO/NOGO



Test Program Editing

Transducer Module		A849102	A849103	A849104
Input				
Vrms	Range	0~80V / 0~500V	0~80V / 0~500V	0~80V / 0~500V
	Bandwidth	200 KHz @ -3dB	200KHz @ -3dB	200KHz @ -3dB
	Accuracy	0.3%+0.2%F.S.	0.3%+0.2%F.S.	0.3%+0.2%F.S.
Irms	Range	0~100mA 0~200mA 0~400mA	0~400mA 0~800mA 0~1600mA	0~5A 0~10A 0~20A
	Bandwidth	200KHz @ -3dB	200KHz @ -3dB	200KHz @ -3dB
	Accuracy	0.5%+0.5%F.S.	0.5%+0.5%F.S.	0.5%+0.5%F.S.
Ripple Current (rms & p-p)	Range	0~50mAp-p 0~100mAp-p 0~150mAp-p	0~100mAp-p 0~400mAp-p 0~800mAp-p	0~1.25Ap-p 0~5Ap-p 0~10Ap-p
	Bandwidth	20MHz @ -3dB	20MHz @ -3dB	20MHz @ -3dB
	Accuracy	0.5%+0.5%F.S.	0.5%+0.5%F.S.	0.5%+30mA@5A 0.5%+60mA@10A/20A
Voltage Ripple/Noise (rms & p-p)	Range	2.5Vp-p/ 20Vp-p	2.5Vp-p/ 20Vp-p	2.5Vp-p/ 20Vp-p
	Bandwidth	20MHz @ -3dB	20MHz @ -3dB	20MHz @ -3dB
	Accuracy	1% F.S.	1% F.S.	1% F.S.
-3dB Tolerance		±1 dB	±1 dB	±1 dB
Output				
9 Pin D-sub (to 84911 M card)	Range	4Vpk	4Vpk	4Vpk
BNC (to 80611N card)	Range	2Vp-p	2Vp-p	2Vp-p

Chroma

HEADQUARTERS CHROMA ATE INC.

66 Huaya 1st Road, Guishan, Taoyuan 33383, Taiwan
T +886-3-327-9999
F +886-3-327-8898
info@chromaate.com
www.chromaate.com

ASIA CHROMA JAPAN CORP.

888 Nippa-cho, Kouhoku-ku, Yokohama-shi,
Kanagawa, 223-0057 Japan
T +81-45-542-1118
F +81-45-542-1080
www.chroma.co.jp

CHROMA ELECTRONICS (SHENZHEN) CO., LTD.

8F, No.4, Nanyou Tian An Industrial Estate,
Shenzhen, China 518052
T +86-755-2664-4598
F +86-755-2641-9620
www.chroma.com.cn

QUANTEL PTE LTD.

(a company of Chroma Group)
46 Lorong 17 Geylang # 05-02 Enterprise
Industrial Building, Singapore 388568
T +65-6745-3200
F +65-6745-9764 sales@quantel-
global.com www.quantel-global.com

U.S.A.

CHROMA SYSTEMS SOLUTIONS, INC.

19772 Pauling, Foothill Ranch, CA 92610
T +1-949-600-6400
F +1-949-600-6401
sales@chromausa.com
www.chromausa.com

EUROPE

CHROMA ATE EUROPE B.V.

Morsestraat 32, 6716 AH Ede, The Netherlands
T +31-318-648282
F +31-318-648288
sales@chromaeu.com
www.chromaeu.com

CHROMA GERMANY GMBH

Südtiroler Str. 9, 86165 Augsburg, Germany
T +49-821-790967-0
F +49-821-790967-600
sales@chromaeu.com
www.chromaeu.com